

Double 60 Commercial Sliding & Folding Door Systems

## **Door Specifications**

- Maximum Door Weight: 27kg
- Door Thickness: 22-35mm
- Door Construction:
   Frame width 30mm minimum to accommodate hanger aprons. Door width quarter height minimum, handle two thirds from bottom for best results.
- Maximum Door Width: 1000mm

- Maximum Door Height: 2000mm
- Track Dimensions:
   53mm (w) x 27mm (h)

## **Hardware Specifications**

- One piece anodised aluminium double top track
- Top track soffit fixed
- Bottom guides may be rebated, surface fixed or a recess routed into the bottom of the door to allow guide to be offered

- Smooth and quiet in operation
- Minimal maintenance
- Can be used with Coburn soft closer kit


# **Double 60**

# Commercial Sliding & Folding Door Systems

### **Product Overview**

Double 60 is an internal sliding door system for wardrobe and other storage units. It is suited to applications such as hotel wardrobes and cupboards and is a reliable and durable system which operates easily with minimal maintenance.

#### Technical Specification

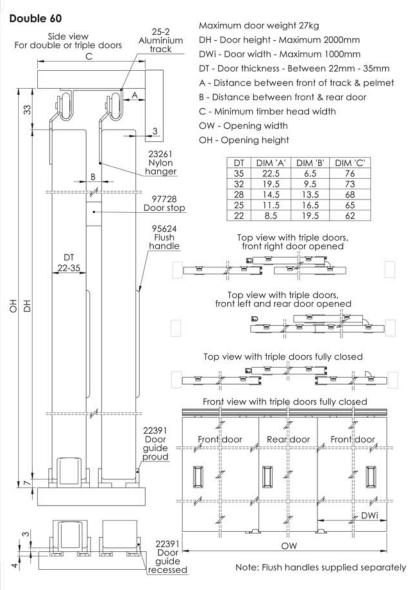

Article No.	Description	Image
06024	Trackset for two doors within a 1.2m opening	Marie A
06025	Trackset for two doors within a 1.5m opening	William Control
06026	Trackset for two doors within a 1.8m opening	Water of the second
06028	Trackset for three doors within a 2.4m opening	111
06021	Single component pack	
252	Anodised aluminium track available in 1.2, 1.5, 1.8 and 2.4m lengths	
23261	Pair of hangers	
30627	Soft closer kit (one per door needed)	2
95624	Rectangular flush handle, 40mm x 90mm, aluminium (For our full range of accessories see pages 96-97)	

Trackset contents: Double piece top track, hangers, nylon guides, door stop and all woodscrews.

Component pack contents: Hangers, nylon guides, door stop and all woodscrews.



For further information please contact us:

Tel: +44 (0)20 8545 6680 sales@coburn.co.uk www.coburn.co.uk

