



Duoswing Commercial Sliding & Folding Door Systems

Door Specifications

- Maximum Door Weight: 70kg
- Door Thickness: 35-50mm
- Door Width: 686mm, 762mm or 838mm
- Maximum Door Height: 1981mm
- Track Dimensions:
45mm (w) x 40mm (h)

Hardware Specifications

- Aluminium track
- Easy manual operation
- Nylon wheeled rollers for smooth running
- Vertical and lateral adjustment
- Ideal for where space is at a premium

- Suitable for doors facing each other leading into a narrow corridor
- No alteration of the wall needed
- It can be used with all doors types; wood, glass, metal, composite etc
- Uses rototranslation technology, a space saving alternative to swing doors

Duoswing

Commercial Sliding & Folding Door Systems


Product Overview

Duo Swing has been developed to minimise the door swing area whilst maintaining the opening width of a conventional door. Whilst a standard swing door uses hinges on the edge of the door, the Duo Swing uses top and bottom pivots allowing the door to open with half of it on either side of the frame.

This simultaneous rotation and swing movement of the door leaf during the opening and/or closing stages saves 50% of the layout space making even small rooms accessible.

Technical Specification

Duoswing

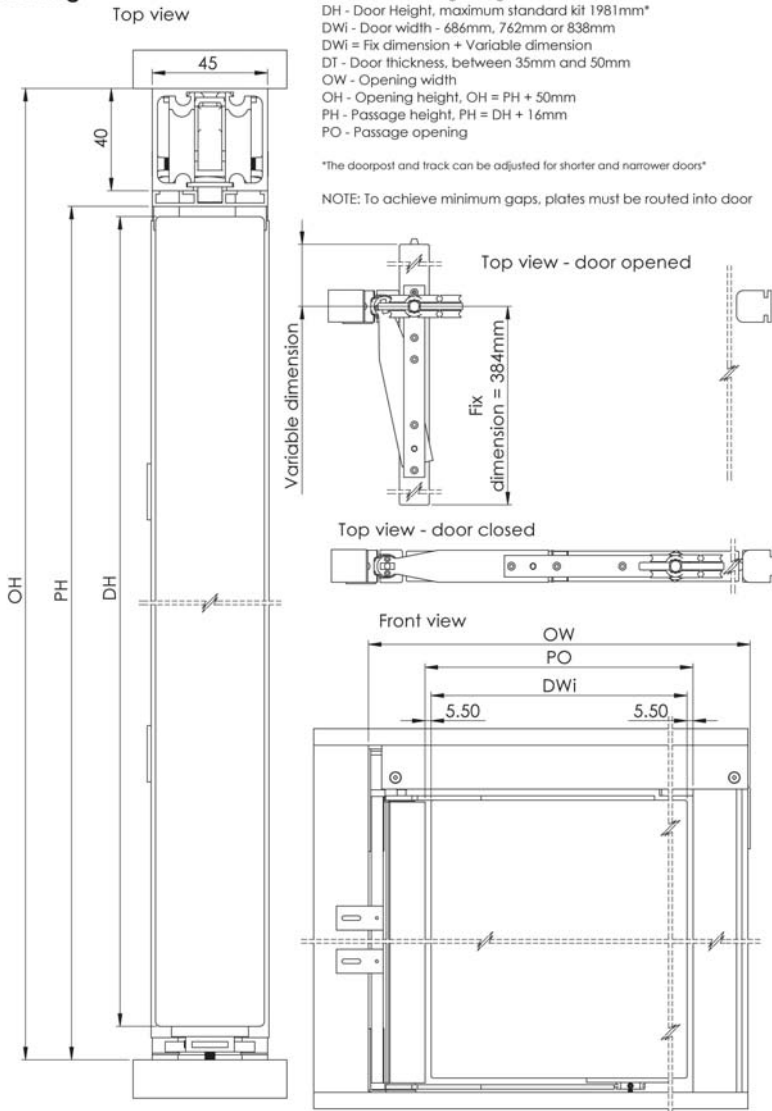

Article No.	Description	Image
61201	Kit to suit door size 686mm x 1981mm	
61202	Kit to suit door size 762mm x 1981mm	
61203	Kit to suit door size 838mm x 1981mm	
61207	Pair of Tanganika vertical uprights	
61208	Soft opening kit	

Contents per set: Aluminium top track, top and bottom pivot arm, corner bracket, threaded rod, rod guide, rod connector, suspension roller with plate, ball catch, door lock, brush strips.



For further information please contact us:
 Tel: +44 (0)20 8545 6680 sales@coburn.co.uk www.coburn.co.uk

