



Foldaside 340 Commercial Sliding & Folding Door Systems

Door Specifications

- Maximum Door Weight:
50kg **using 3-20 track**,
55kg **using 3-25 track**
- Door Thickness: 40mm - 55mm
- Maximum Door Width: 900mm
- Maximum Door Height:
3300mm **using 3-20 track**,
3600mm **using 3-25 track**
- Track Dimensions:
3-20 track 47mm (w) x 63mm (h)
3-25 track 49mm (w) x 64mm (h)
- Door Construction:
Up to 8 leaves may be hinged together.
Loose or floating suites of door leaves are not recommended. Width of door leaves vary according to arrangements; refer to drawings for details. Rebating to suit hanger aprons is shown. Swing leaves are best hinged to jambs.

When hinged to folding suites reduce door leaf widths to 800mm and use four wheel hangers for adjoining swing door. Always engage holdback catch before operating. 2 wheel and 4 wheel hangers should be used alternatively as shown in the technical drawing.

Hardware Specifications

- Galvanised steel top track usually soffit fixed. Universal soffit bracket designed for ease of fixing and versatility. Additional brackets required where doors fold
- Hangers are steel with nylon wheels, ball bearing and lubricated for life
- Door guide with steel angle plate fits rebate of door, brass rollers

- Aluminium or steel bottom channel drilled and countersunk for woodscrews to be recessed into floor
- Equal leaves can be achieved by using jamb pivot set (suitable for doors up to 45kg only)

SPECIAL NOTE:

When jamb pivots are replaced by hinges, particular attention should be paid by the joiner to leaf sizes and the use of Dimension A or B as shown. However, where leaves weigh less than 45kg, a jamb pivot may be used to make this unnecessary.


Foldaside 340

Commercial Sliding & Folding Door Systems

Product Overview

Foldaside 340 is a heavy weight folding system for internal timber doors. Suitable for room dividers in hospitals, schools and similar.

Technical Specification

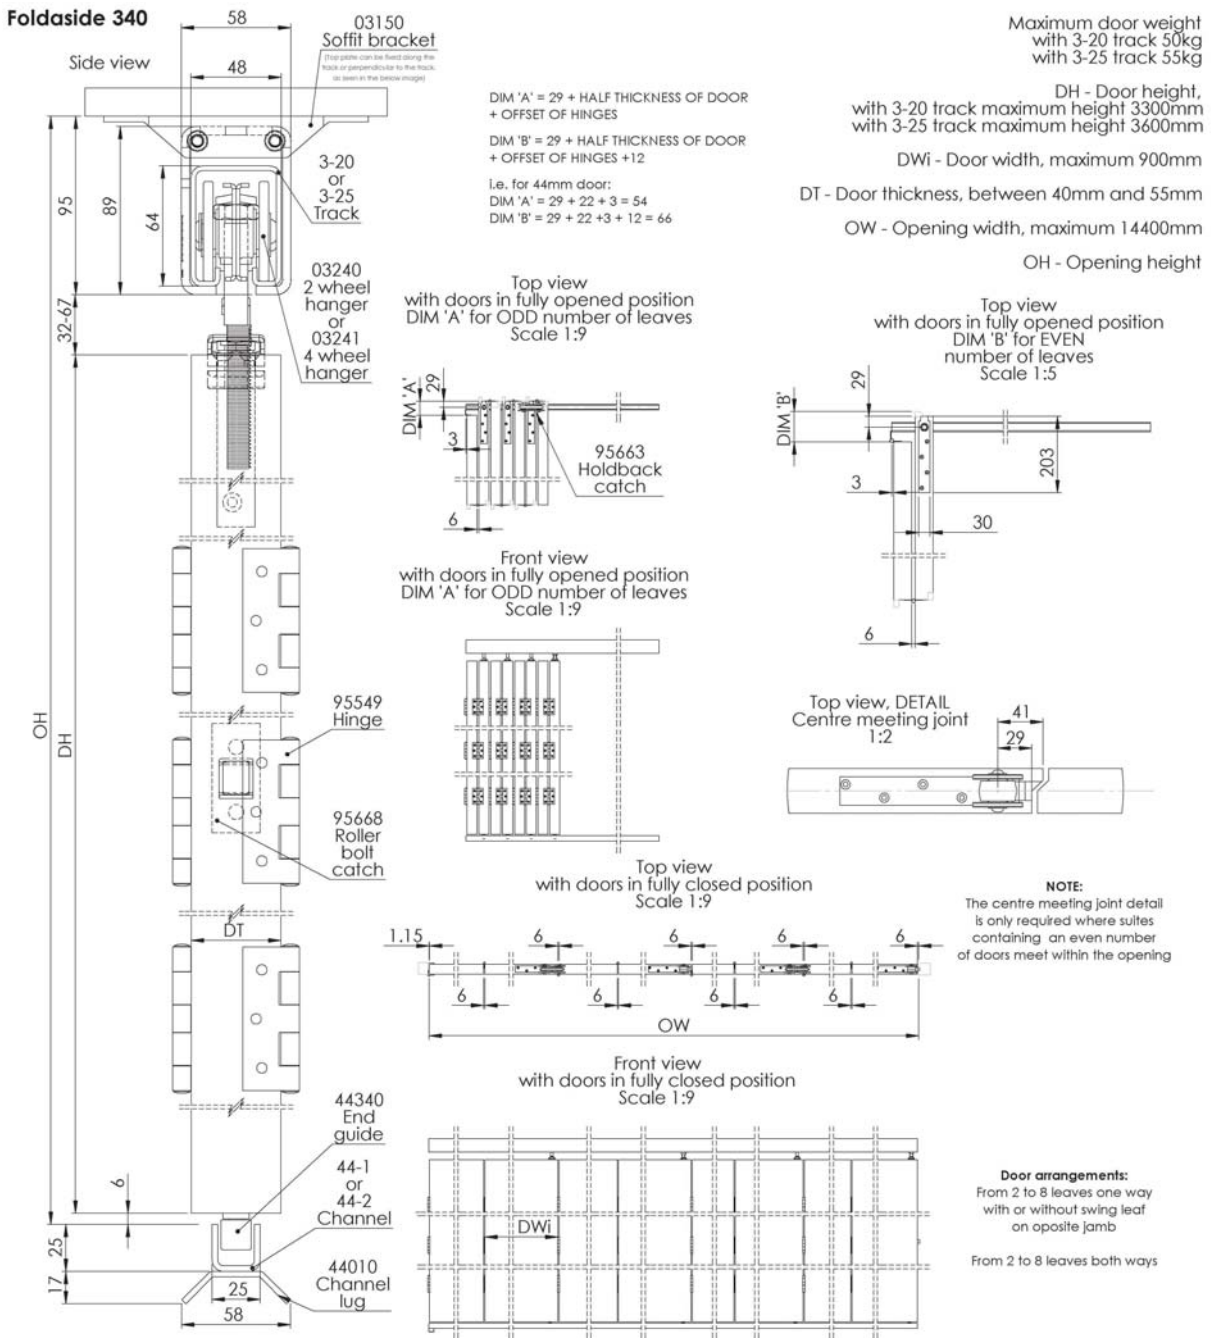

For further information please contact us:
Tel: +44 (0)20 8545 6680 sales@coburn.co.uk www.coburn.co.uk

Foldaside 340

Commercial Sliding & Folding Door Systems

Article No.	Description	Image
320	Galvanised steel top track 2.0mm thick, available in 1.8, 2.1, 2.4, 3.0, 4.0, 6.0m lengths	
325	Galvanised steel top track 2.5mm thick, available in 1.8, 2.1, 2.4, 3.0, 4.0, 6.0m lengths	
441	Steel bottom channel, available in 1.5, 1.8, 2.1, 2.4, 3.0, 4.0m lengths	
442	Aluminium bottom channel, available in 1.5, 1.8, 2.1, 2.4, 3.0, 3.6, 6.0m lengths	
03240	2 wheel folding hanger, nylon wheels	
03241	4 wheel folding hanger, nylon wheels	
03150	Open universal soffit bracket	
03051	Closed end piece (pair) for use with open universal soffit brackets	
03152	Lock joint universal soffit bracket	
03190	Open soffit bracket	

Article No.	Description	Image
03192	Lock joint soffit bracket	
44340	End guide, steel angle plate fits rebates of doors, brass rollers	
95518	Top and bottom jamb pivot set for equal width doors	
95549	Stainless steel butt hinges (pack of 3)	
95697	Flush bolt – power coated silver 190mm	
95663	Holdback Catch (Silver)	
95612	Rectangular flush handle, 50mm x 100mm, stainless steel (For our full range of accessories see pages 96-97)	