



# Flexiglas Synchro Glass Door Systems



## Product Overview

The Flexiglas Synchro system brings a sleek and minimalistic design to any space and offers versatility and transparency to suit customers' aesthetic requirements.

The frameless glass system is suitable for interior bi-parting glass doors up to 80kg per leaf and can also be used with doors where soft close cushioning required.

## Features


- No glass preparation required
- Soft closing available as an option
- System is compatible with Flexiglas 50 & Flexiglas 120 systems
- No visible gaps between bottom of track and top of door
- Variable height adjustment on doors
- Additional profiles available for fixed panel mounting
- Tracks available in anodized aluminium or stainless steel finishes
- Suitable for tempered or laminated glass

## Technical Specifications

- Maximum Door Weight: 80kg
- Maximum Door Height: 2700mm
- Glass Thickness: 8 – 10mm
- Track Dimensions: 52mm (w) x 58mm (h)



Synchro mechanism and clamp retrofitted into track

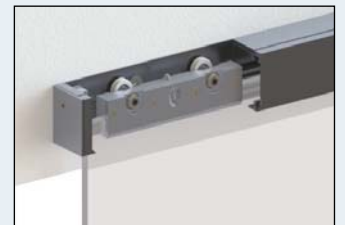

80kg glass clamp carrier



Track c/w cover profile and end caps



Glass floor guide




FLEXIGLAS SYNCHRO KIT

Maximum door weight 80kg

DWi - Door width  
with Flexiglas 50, minimum is 450mm and maximum 2000mm  
With Flexiglas 120, minimum is 650mm and maximum 2000mm

DT - Door thickness between 8mm or 10mm

NOTE: Wire length ~ 8500mm

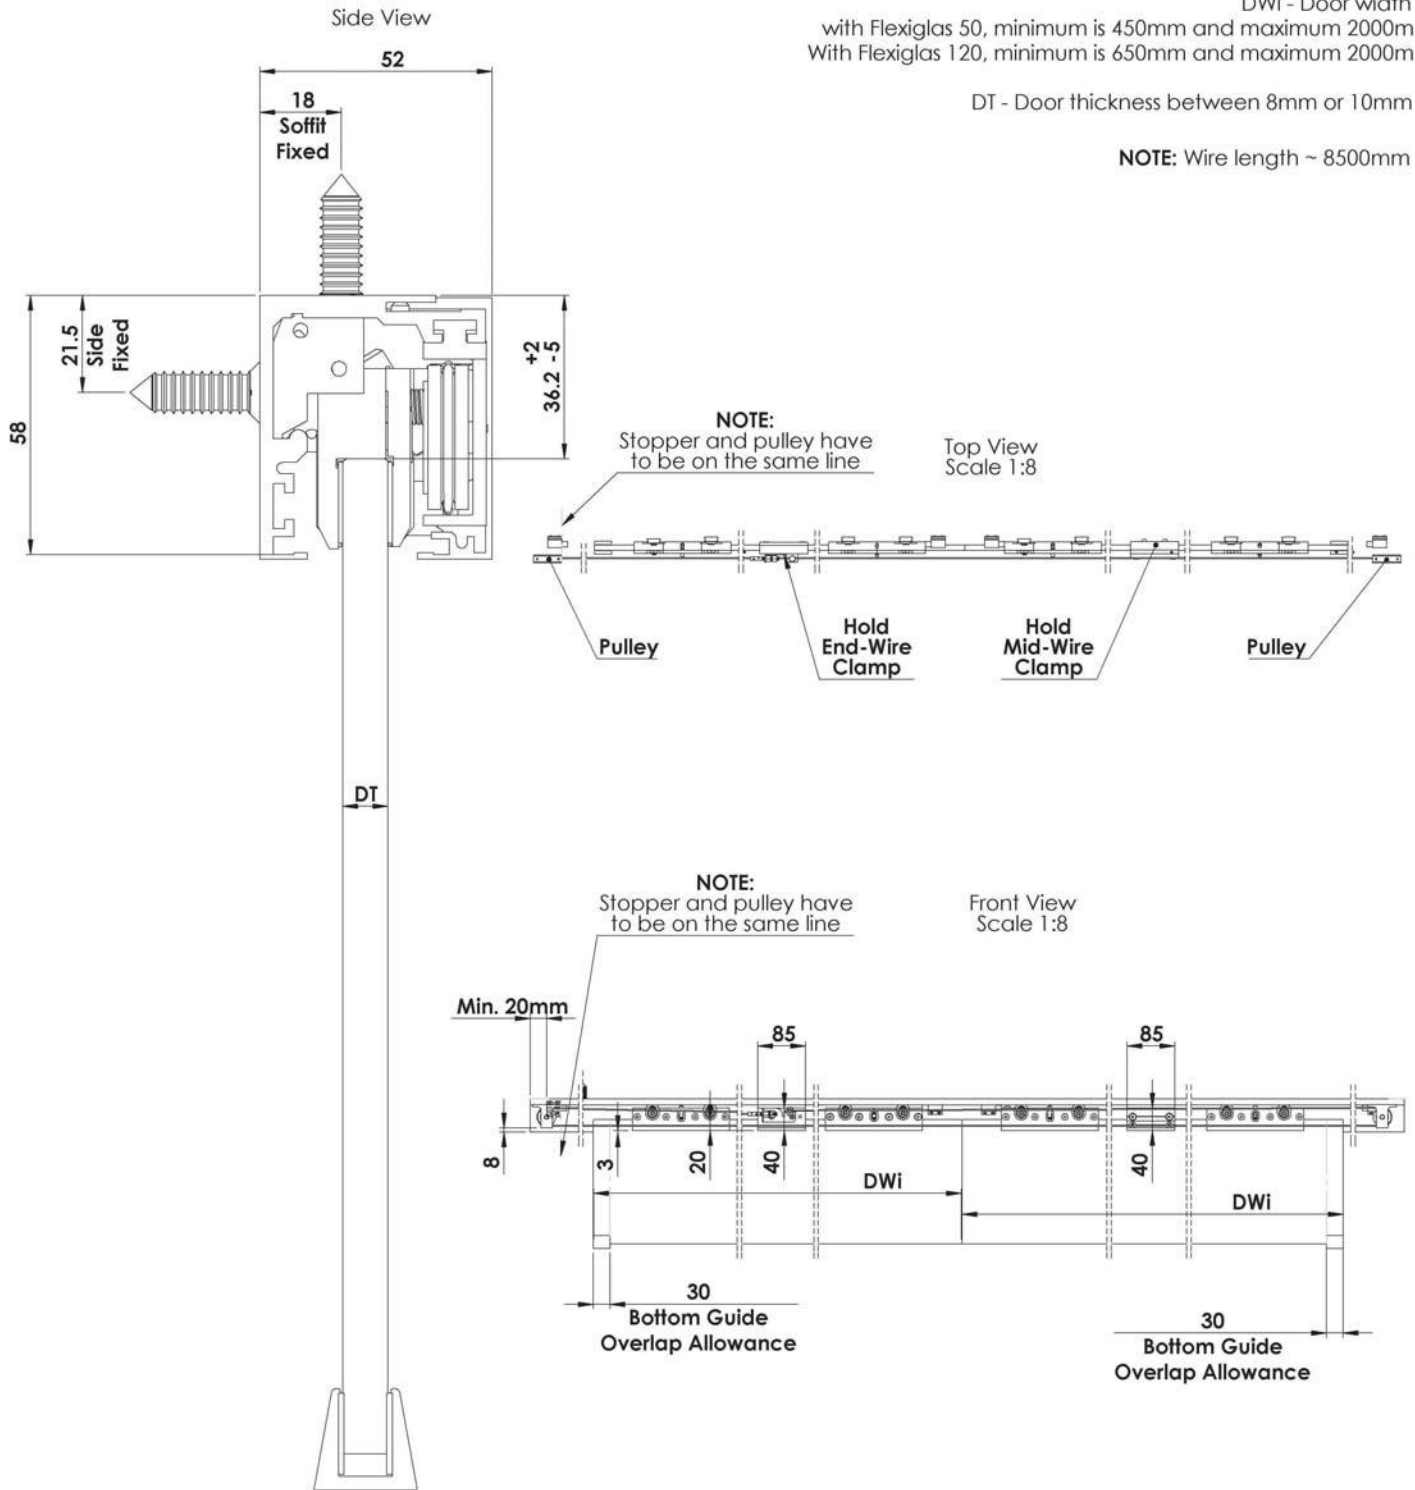

For further information on our products and services:  
Tel: +44 (0)20 8545 6680 sales@coburn.co.uk www.coburn.co.uk

Coburn Sliding Systems Limited  
Unit 1, Cardinal West, Cardinal Way, Cardinal Distribution Park,  
Godmanchester, Huntingdon, Cambridgeshire, PE29 2XN United Kingdom.

Dealer Stamp