



Flushslide Wardrobe Sliding Door Systems



Product Overview

Flushslide is a stylish and contemporary hardware system where flush fitted sliding wardrobe doors open by co-planing across the face of the other wardrobe doors, to give a smooth and silent operation. All components are discreetly concealed behind the wardrobe doors. The system comes equipped with soft closing dampers and offers countless interior design possibilities.

Features

- Sliding doors aligned in a single plane when doors are in closed position (no overlapping)
- Top and bottom tracks are supplied in anodized aluminium finish
- Opening and closing mechanisms can be easily fitted
- Tracks and sliding mechanisms are concealed when doors are in open or closed positions
- System supplied with integrated soft closing and soft opening dampeners as standard
- Suitable for large wardrobe sliding doors
- Tracks can be easily cut to size
- Kits available for 2 or 3 sliding doors with exterior door overlapping

Technical Specifications

- Maximum Door Weight: 85kg
- Door Thickness: 20-45mm
- Maximum Door Height: 3000mm



Top rail with R/H sliding unit c/w soft closers (door open)



Top rail with L/H sliding unit c/w soft closers (door closed)



Top rail with R/H sliding unit c/w soft closers (door closed)






Bottom rail with sliding unit



Flushslide

OW for 2 doors with 55kg rollers is between 1500mm and 2539mm.
OW for 2 doors with 85kg rollers is between 2540mm and 3000mm
OW for 3 doors with 55kg rollers is between 2700mm and 3300mm

Maximum door weight 85kg
DH - Door height, maximum 3000mm
DWi - Door width
DT - Door thickness, between 20mm and 45mm
OH - Opening height
In opened position doors are fully overlapping

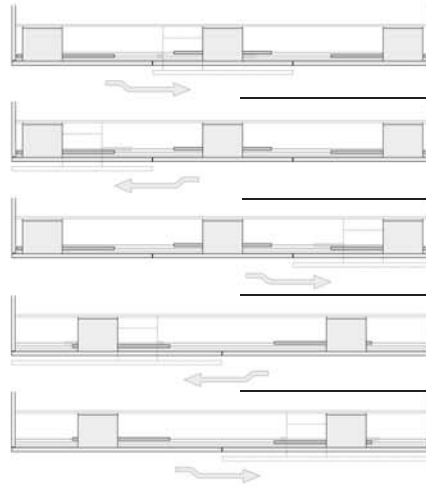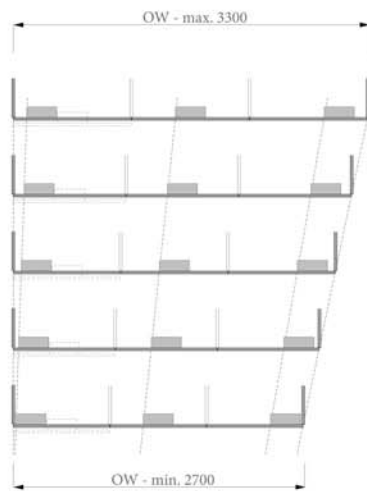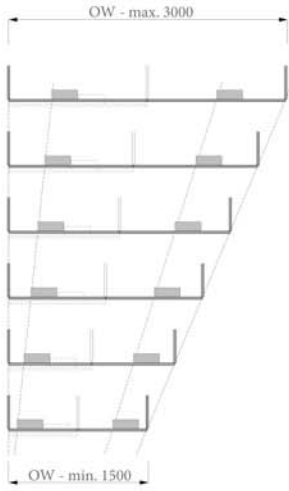


3 door system
left door opening to the right

3 door system
centre door opening to the left

3 door system
centre door opening to the right

2 door system
right door opening to the left

2 door system
left door opening to the right

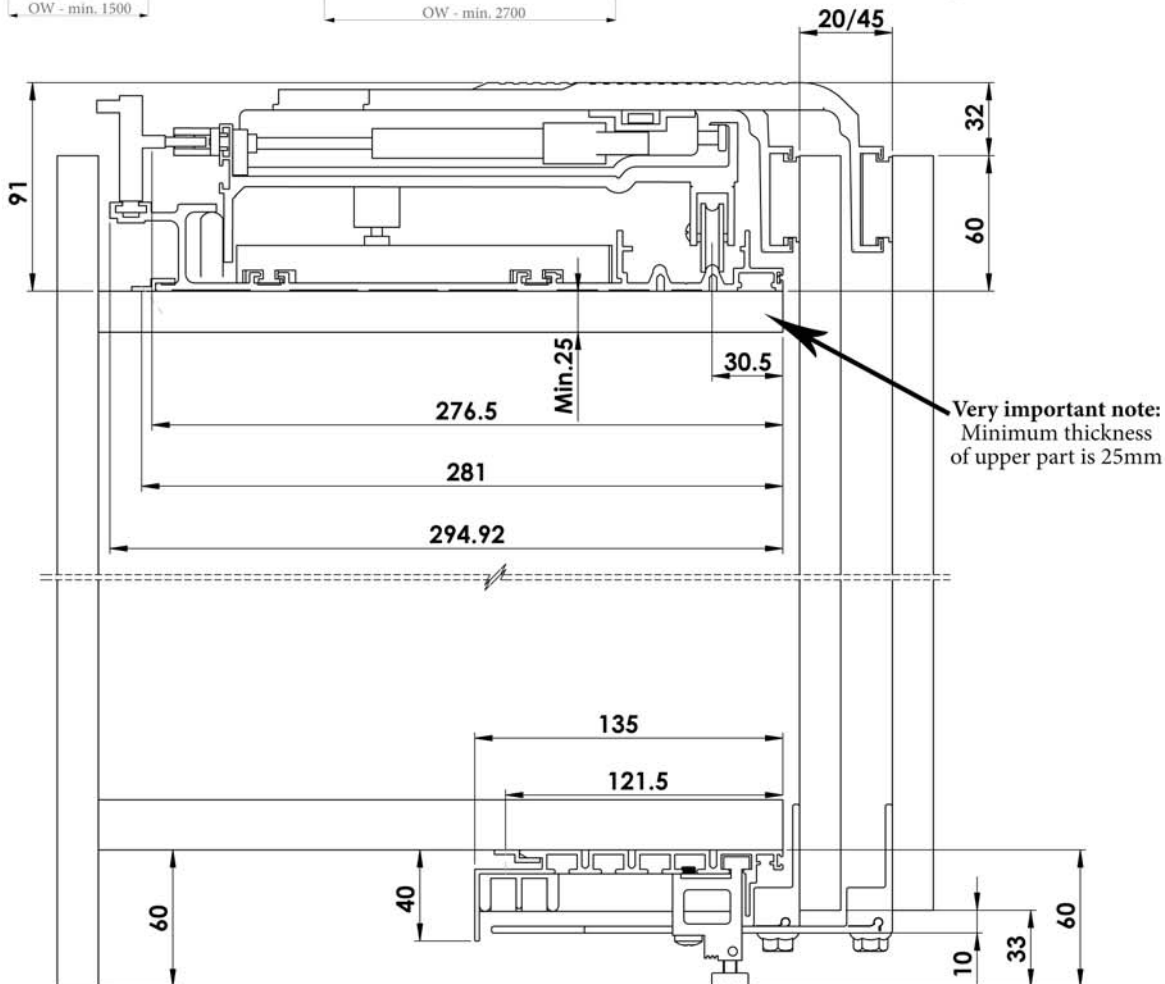

Very important note:
Minimum thickness
of upper part is 25mm



For further information on our products and services:
Tel: +44 (0)20 8545 6680 sales@coburn.co.uk www.coburn.co.uk

Coburn Sliding Systems Limited
Unit 1, Cardinal West, Cardinal Way, Cardinal Distribution Park,
Godmanchester, Huntingdon, Cambridgeshire, PE29 2XN United Kingdom.

Dealer Stamp