

FITTING INSTRUCTIONS FOR SOFT CLOSER

CONTENTS



1X SOFT CLOSER



1X ACTUATOR




2x 19mm LONG SCREWS



2x 28mm LONG SCREWS

Installing the soft closer on the door **Step 1**

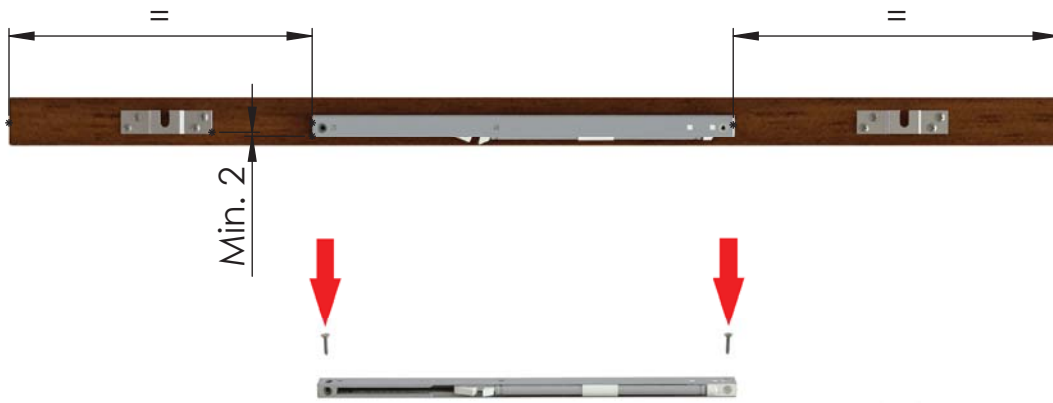

Put the soft closer on to the door and mark the position following the details provided.

Ensure the soft closer trigger is facing in the opposite direction to the hanger plates




Secure the soft closer to the door with screws supplied




Install the door **Step 2**




Insert the door into pocket frame, ensure that the door runs straight in line with the track and ensure frames level...

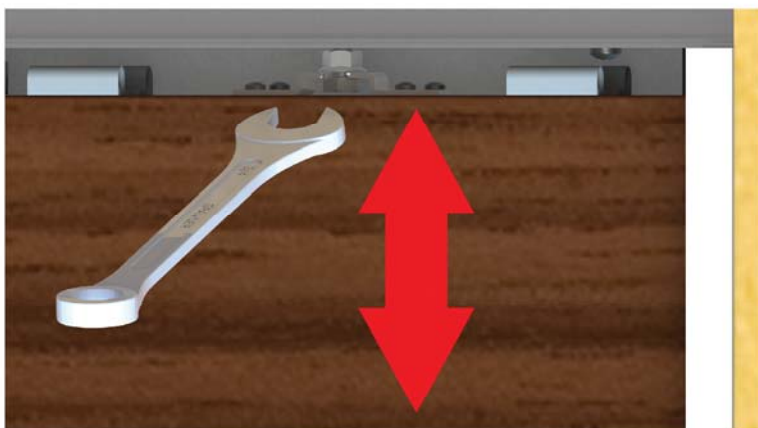

... by adjusting the hanger bolts

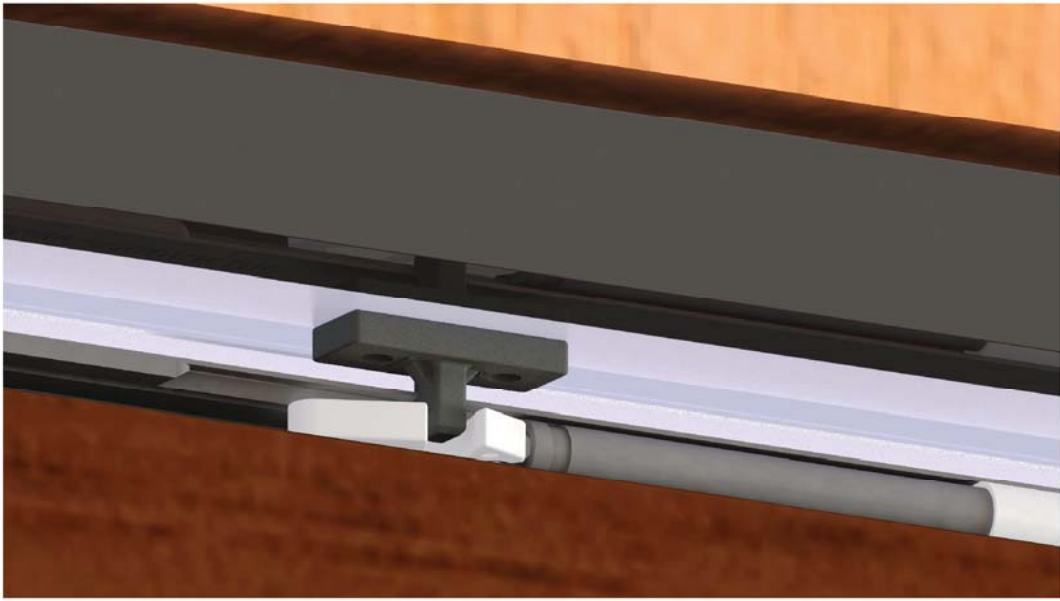

1. Fully close the door
2. Ensure that the soft closer is in closed position
3. Insert the actuator in the soft closer and place it on the track
4. Mark the position of the actuator

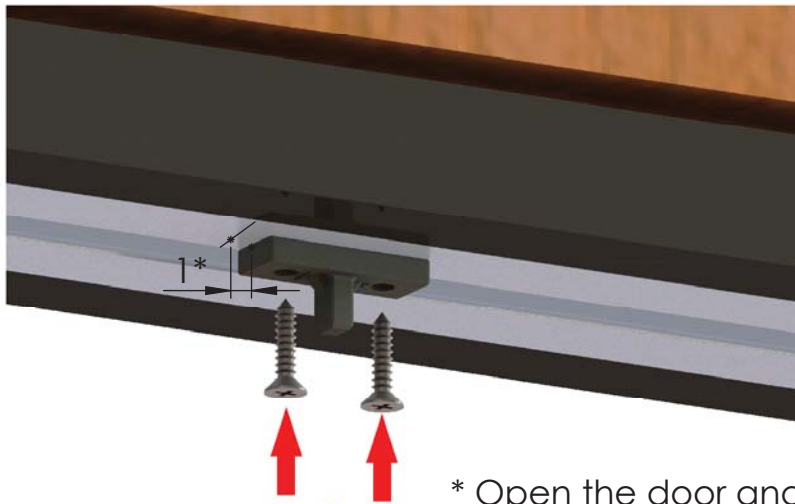

Fix the actuator and final inspection **Step 4**



* Open the door and offset the marked line by 1mm to the direction of door closing in order to give some tolerance

Fix the actuator in the marked position with screws supplied.

Open and close the door and ensure that there is enough clearance between the actuator, the door and the door plates



Soft Closer



Coburn Sliding Systems Limited
Unit 1, Cardinal West, Cardinal Way,
Godmanchester, PE29 2XN, United Kingdom

Phone: +44 (0)20 8545 6680

Fax: +44 (0)20 8545 6720

E-mail: sales@coburn.co.uk

www.coburn.co.uk