


# MICROLINE FITTING INSTRUCTIONS

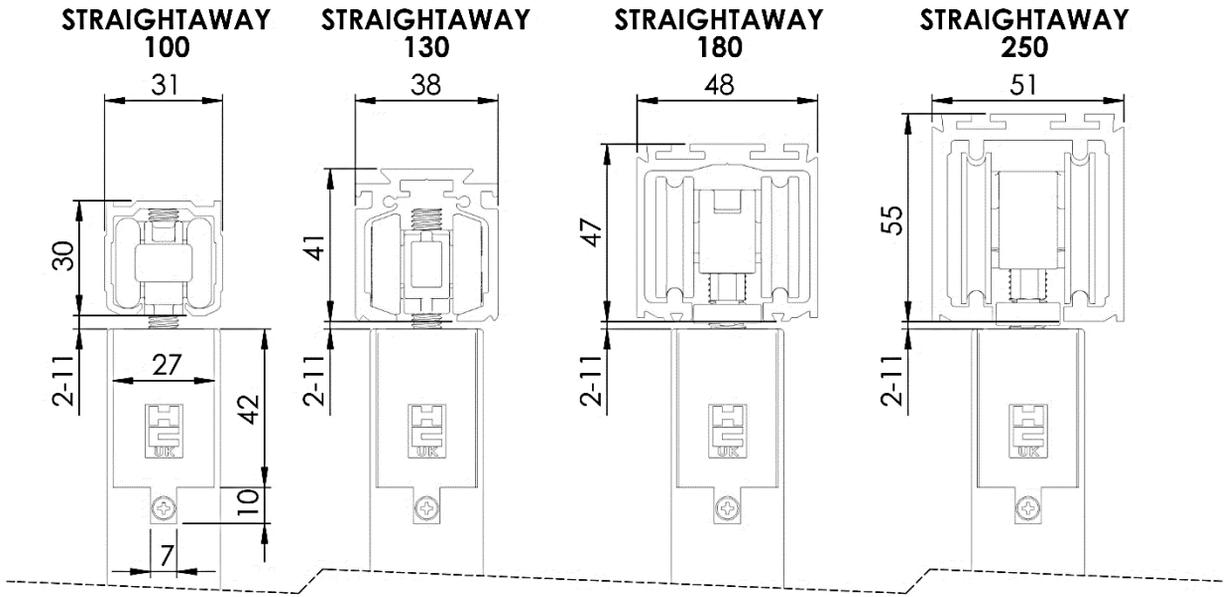


## MICROLINE SPECIFICATIONS


Minimum door thickness: 34mm

Maximum door weight is 250kg  
(depending on system used)


### STRAIGHTAWAY 100

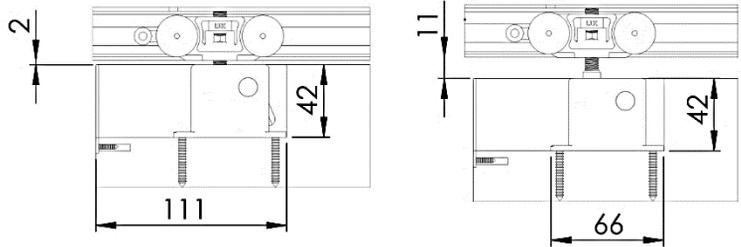


### STRAIGHTAWAY 130

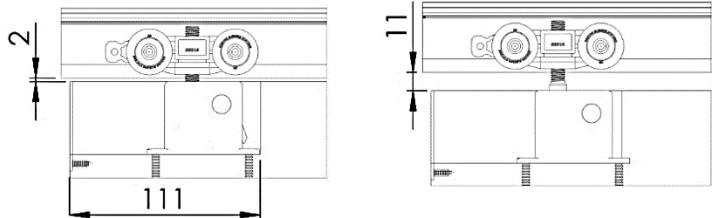

### STRAIGHTAWAY 180

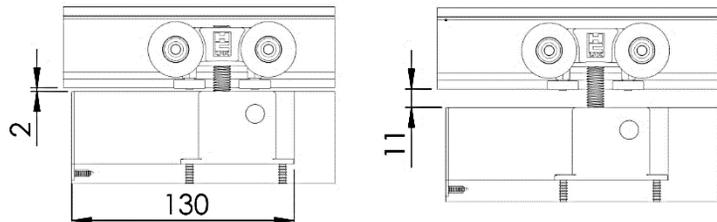

### STRAIGHTAWAY 250

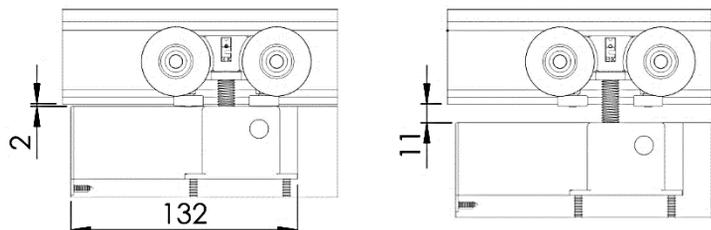

# COMPONENTS



## 97741 – MICROLINE INSTALLATION KIT

### Step 1 Door preparation

1. On top of door make routing for Microline hardware.

Width = 26mm


Depth = 42mm

Length = L = for Straightaway 100 = 111mm

= for Straightaway/Eternal 130 = 111mm

= for Straightaway/Eternal 180 = 130mm



= for Straightaway/Eternal 250 = 132mm

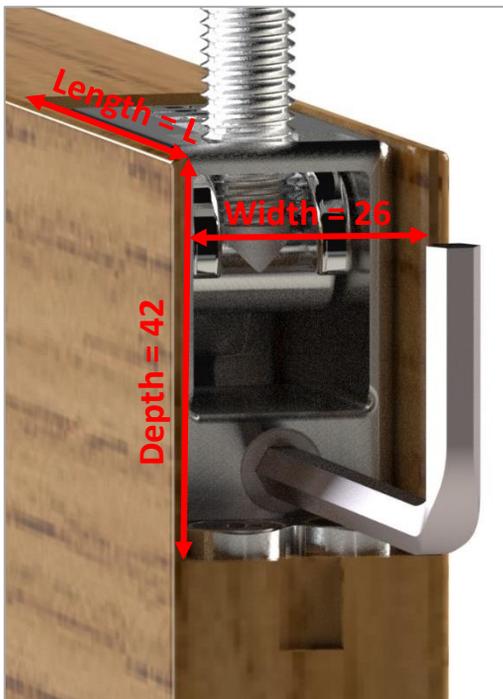

2. On door edges make a mortise 2mm deep, 7mm wide and 10mm high, to accommodate end cap head and another mortise 2mm deep and 27mm wide along the routing for the end cap body

### Step 2 Fitting kit


**NOTE:** Height adjustment is made with the adjusting screw on Microline kit, not the pendant bolt as with the normal Straightaway system. To achieve the minimum gap of 2 mm, before inserting hanger into track or fitting kit into door, assemble the hanger with Microline kit: screw the adjusting screw to maximum and wind the pendant bolt into hanger until a minimum gap is achieved with both components are facing the same way( see picture on the left). Unwind adjusting screw until clamp is loose and can be fixed back to interior top edge of casing and retract pendant bolt from kit.

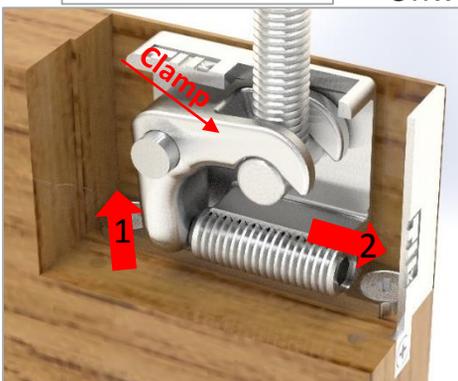

1. Butt the hardware to the edge of routing and secure with screws.

2. Make sure the adjusting screw faces door exterior

### Step 3 Door hanging

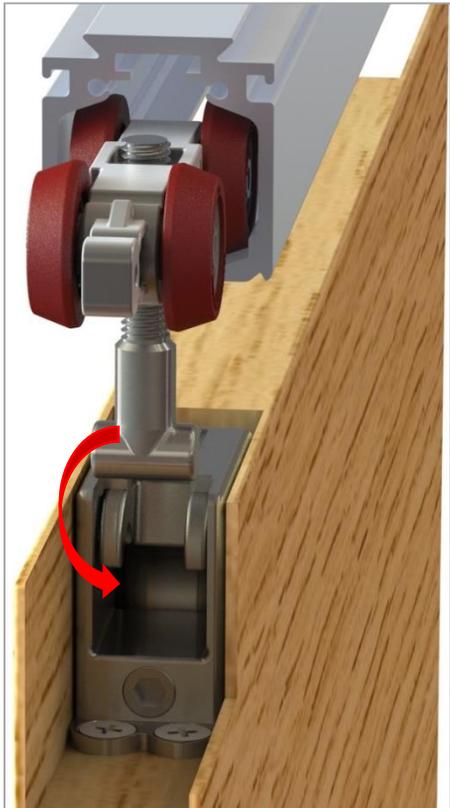

Insert door guide into floor channel or door channel into floor guide, raise door and insert pendant bolt into clamp. Make sure clamp is raised.

### Step 4 Height adjustment



Use Allen key for height adjustment



Place end cap over routing and secure with screw



Coburn Sliding Systems Limited  
Unit 1, Cardinal West, Cardinal Way,  
Godmanchester, PE29 2XN, United Kingdom

Phone: +44 (0)20 8545 6680

Fax: +44 (0)20 8545 6720

E-mail: [sales@coburn.co.uk](mailto:sales@coburn.co.uk)

[www.coburn.co.uk](http://www.coburn.co.uk)