



Straightaway 660 Commercial Sliding & Folding Door Systems

Door Specifications

- Maximum Door Weight: 55kg
- Door Thickness: 30mm - 45mm
- Door Construction:
Width one third height minimum, handle height three fifths from bottom for best results.
- Maximum Door Width: 1000mm
- Maximum Door Height: 2100mm
- Top Channel Dimensions:
15mm (w) x 15mm (h)

Hardware Specifications

- Top channel drilled and countersunk for woodscrews. Soffit fixed, can be surface mounted or recessed
- Floor tracks recessed or surface mounted
- For single, bi parting or bi passing doors
- Bottom rollers have steel casing and are zinc plated with nylon wheels and ground steel axles

- Bottom track drilled and countersunk for woodscrews
- Nylon top guides for top fixing to door

Straightaway 660


Commercial Sliding & Folding Door Systems

Product Overview

Straightaway 660 is a bottom rolling sliding door system for medium weight internal doors. It is suited to applications such as hotels, schools and offices and is an easy to fit reliable system that can be used where there is not sufficient overhead support for a top hung system. Bottom track is available in stainless steel and well as galvanised steel.

Technical Specification

Straightaway 660

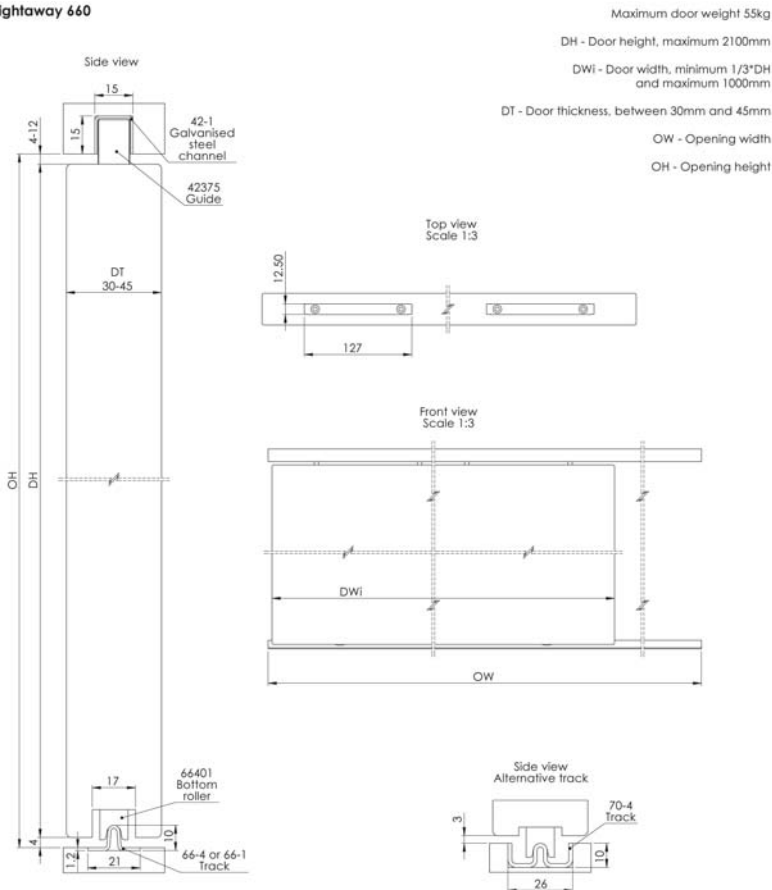

Article No.	Description	Image
421	Galvanised steel top channel, available in 1.2, 1.8, 2.1, 2.4 and 3.0m lengths	
661	Galvanised steel bottom track, available in 1.8, 2.1, 2.4 and 3.0m lengths	
664	Stainless steel bottom track, available in 1.1, 1.5, 2.1 and 3.0m lengths	
704	Stainless steel bottom track, available in 2.4 and 3.0m lengths	
66401	Bottom roller (pair)	
42375	Nylon guide (pair)	
30626	Soft closer kit (one per door needed)	
95612	Rectangular flush handle, 50mm x 100mm, stainless steel. Depth 16mm, consider thickness of doors when fixing back to back. <small>(For our full range of accessories see pages 96-97)</small>	



For further information please contact us:
 Tel: +44 (0)20 8545 6680 sales@coburn.co.uk www.coburn.co.uk

