



## Foldaside 642 Commercial Sliding & Folding Door Systems

### Door Specifications

- Maximum Door Weight: 45kg
- Door Thickness: 44mm only
- Maximum Door Width: 900mm
- Maximum Door Opening Width: 4800mm
- Maximum Door Height: 2400mm
- Door Construction:  
Door leaves are all equal width, but with swing leaves on folding suites reduce door leaf widths to 800mm. As bottom rollers are housed at bottom of stile, keep tenons of rail high to avoid cut-out.  
With swing leaves always engage holdback catch before operating.

### Hardware Specifications

- Bottom track screwed to accurately machined timber cill to provide complete support to the underside of the running tread without voids, and the cill to be firmly fitted to prevent distortion or deflection. Floor track unnecessary under swing leaves
- Needle bearing bottom rollers, ball bearing swivels, complete with satin anodised aluminium cover plates and gold anodised aluminium cover plates
- Brass bottom track drilled and countersunk
- Top guides with nylon roller, steel apron fits rebate of door
- Stainless steel and satin chrome butt hinges


# Foldaside 642

## Commercial Sliding & Folding Door Systems

### Product Overview

Foldaside 642 is a bottom rolling, light duty internal folding door system for commercial properties with return walls sufficiently deep to allow doors to fold through 180°.

### Technical Specification

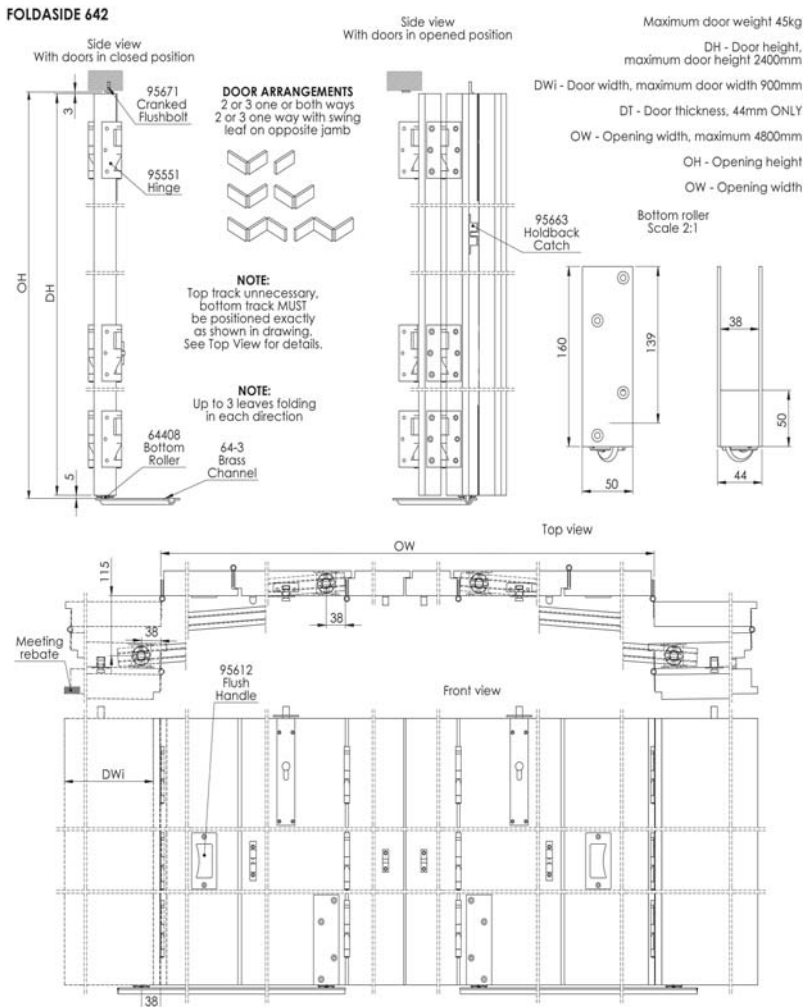

Article No.	Description	Image
64330	Brass bottom track 3.0m	
64408	Bottom roller with satin anodised aluminium and gold anodised aluminium cover plates	
95549	Stainless steel butt hinges (pack of 3)	
95551	Satin chrome butt hinges (pack of 3)	
95663	Hold back catch, silver finish	
95679	Cranked flush bolt, silver anodised aluminium	
95697	Flush bolt 190mm, silver powder coated finish	
95612	Rectangular flush handle, 50mm x 100mm, stainless steel (For our full range of accessories see pages 96-97)	