



EasySlide Sliding Pocket Door System



Product Overview

EasySlide is a high quality and innovative pocket door system for use with plasterboard walls where the door is required to silently slide within a cavity wall. The system is available in kit form and is designed to be easily and quickly fitted to drastically reduce on-site installation time

Features

- Horizontal and vertical profiles manufactured from zinc coated galvanised steel to provide maximum rigidity.
- Click and Snap fitting – No tools required.
- No floor channels required.
- Available in many sizes.
- Jamb kits available to suit 100mm finished wall sizes.
- Jamb kits supplied in Tanganika finish.


Technical Specifications

- Maximum Door Weight: 100kg
- Door Thickness: 30-40mm
- Maximum Door Height: 2500mm
- Track Dimensions: 53mm (w) x 30mm (h)







EASYSLIDE

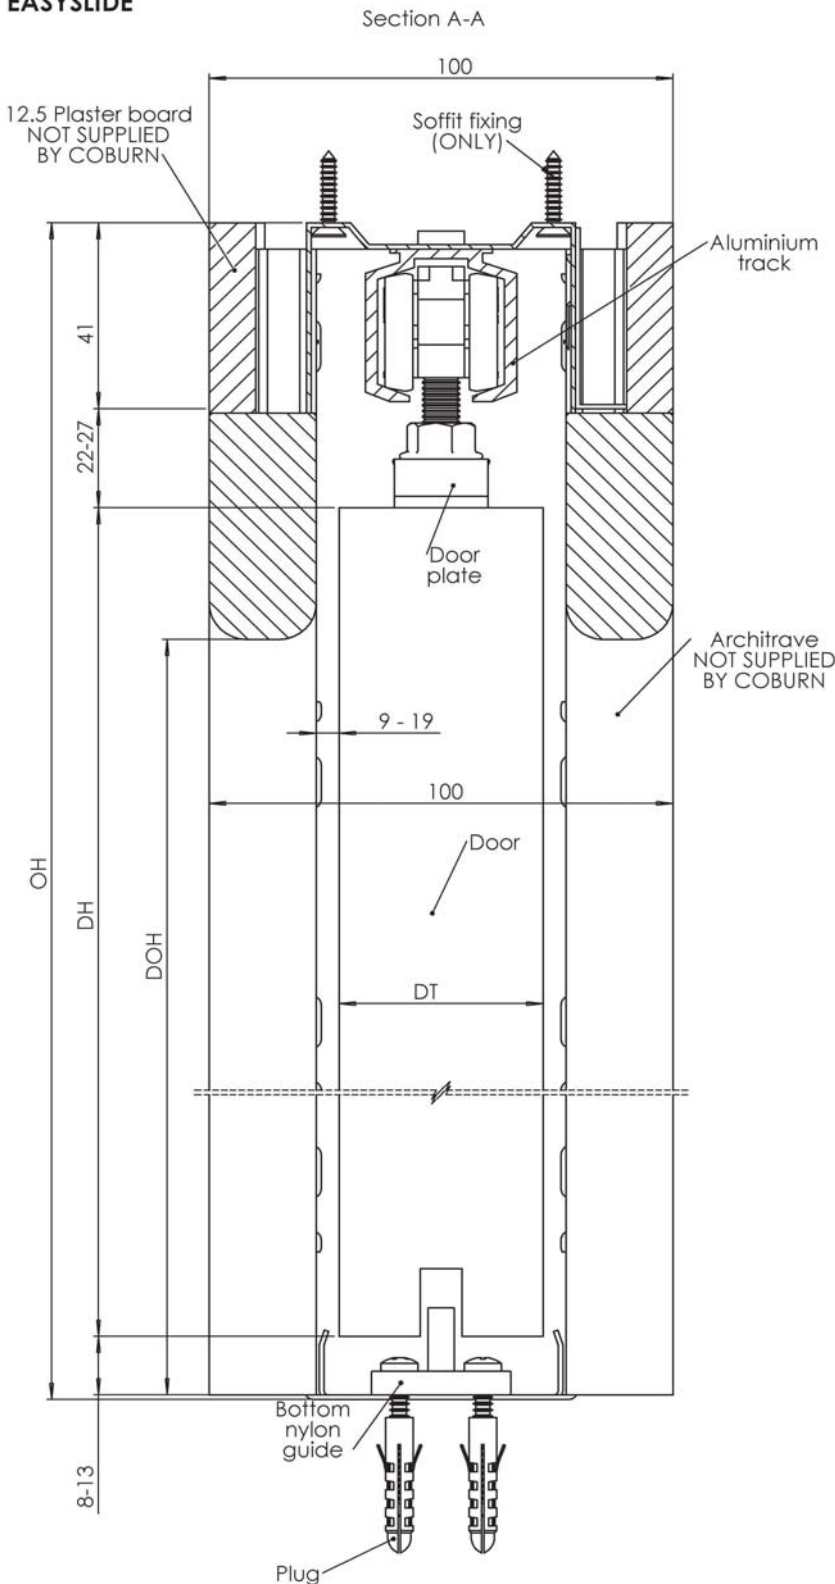

Maximum door weight 100kg
 DH - Door height, 2040mm
 DWi - Door width, maximum 1026mm
 DT - Door thickness, between 30mm and 44mm
 OW - Opening width
 OH - Opening Height
 DOW - Recommended usable door opening width
 DOH - Recommended usable door opening height

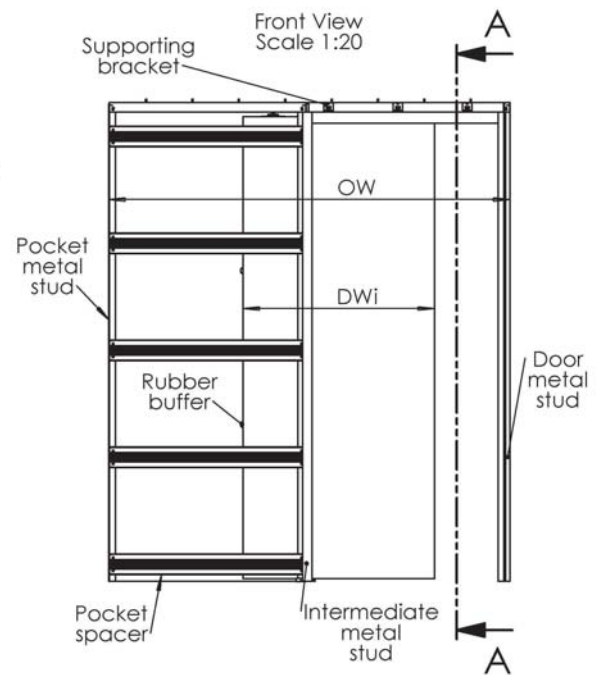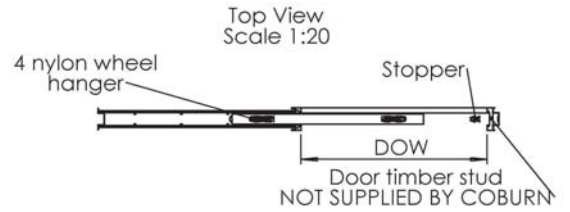

NOTE:
 Other dimensions are available on request

Part No.	DWi x DH	DOW	DOH	OW	OH
62851	610 x 1981	580	1971	1310	2061
62852	686 x 1981	626	1971	1462	2061
62853	762 x 1981	732	1971	1614	2061
62854	838 x 1981	808	1971	1766	2061
62855	914 x 1981	884	1971	1940	2061
62856	626 x 2040	600	2030	1340	2120
62857	726 x 2040	700	2030	1540	2120
62858	826 x 2040	800	2030	1740	2120
62859	926 x 2040	900	2030	1940	2120
62860	1026 x 2040	1000	2030	2140	2120



For further information on our products and services:

Tel: +44 (0)20 8545 6680 sales@coburn.co.uk www.coburn.co.uk

Coburn Sliding Systems Limited

Unit 1, Cardinal West, Cardinal Way, Cardinal Distribution Park,
 Godmanchester, Huntingdon, Cambridgeshire, PE29 2XN United Kingdom.

Dealer Stamp