TRACKLESS SYSTEM

COBURN SLIDING SYSTEMS

DOOR SPECIFICATIONS

Maximum Door Weight : 80Kg
Minimum Door Thickness : 40mm
Door Width : 800mm - 1220mm
Doorway Width : 533 - 953mm

KIT # 71902 include


Accessory	Drawing	1 Door	Accessory	Drawing	1 Door	Accessory	Drawing	1 Door
Top runner		1	Soft close device		2	Side runner		2
Bottom guide roller		1	Bottom runner		2	End caps pair		1
ST4.5*40 cross head tapping screws		5	Screw anchor		5	Top track		1
m4x6 hex fixed screw		4	ST4*16 cross head tapping screws		25	2mm Allen key		1
4mm Allen key		1	Bottom Channel		1			

installation instructions


Door prepartion and cut out details

Note : This product requires a hard floor


Installation Instruction

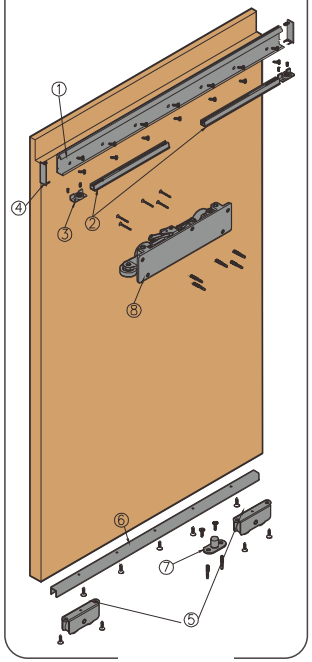

Door Thickness Requirements

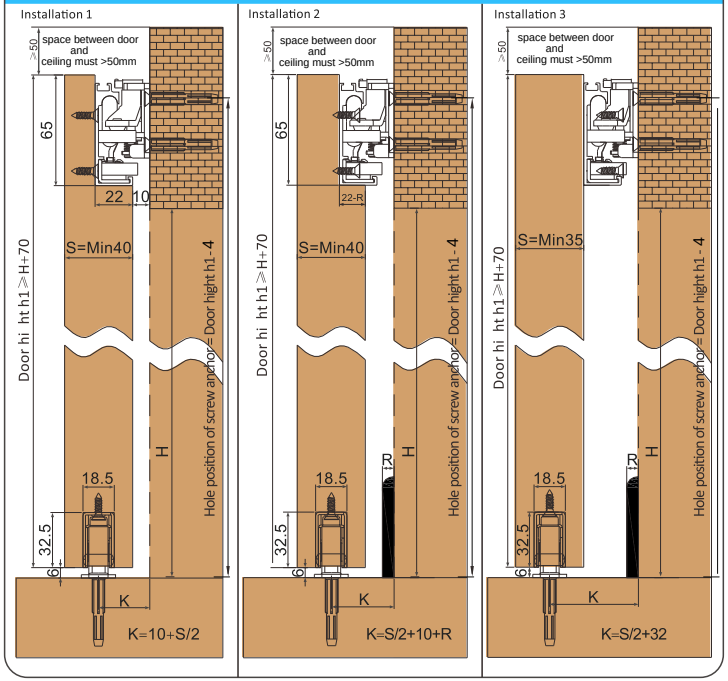


Doorway Opening

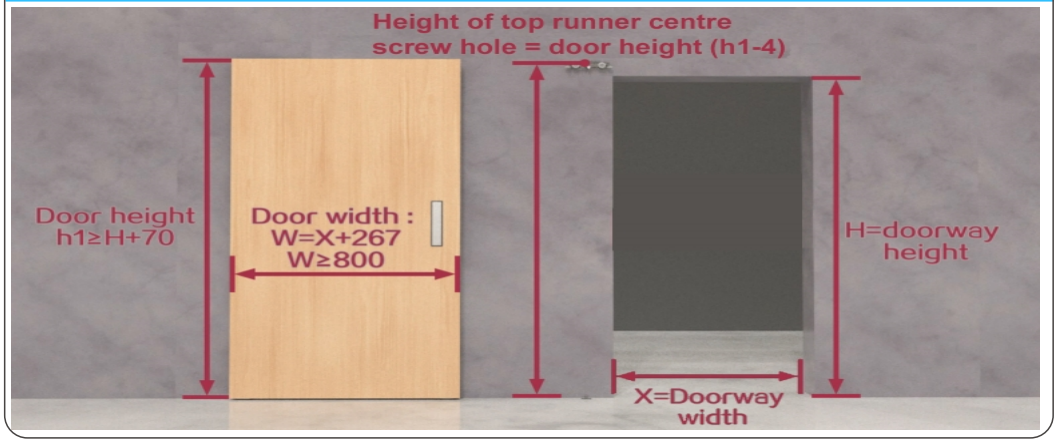


Door cut out Details



Top Track cut out Details

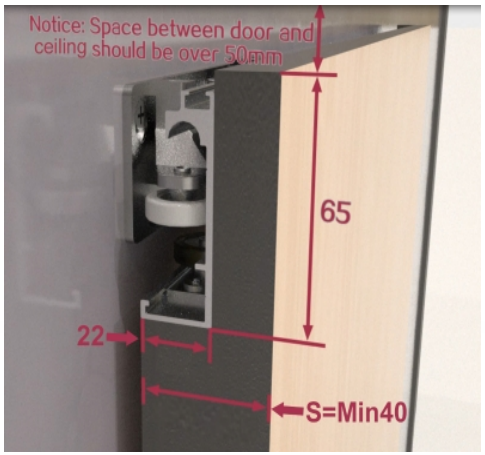

Top runner position

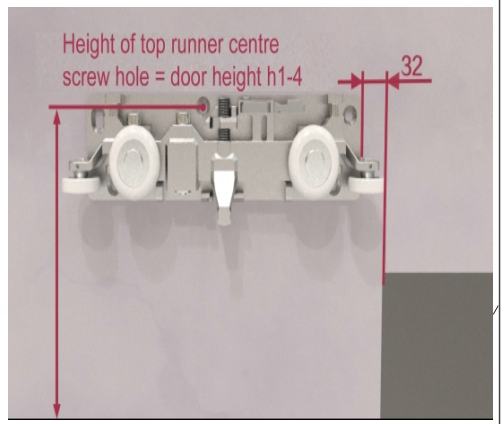


Coburn Sliding S
Cardinal West, Cardinal Way, Cardinal Distribution Park, Godmanchester, Huntingdon, Cambridgeshire. PE29 2XN, United Kingdom
l4 (0) 208545 6680 Email: sales@coburn.co.uk Web: www.coburn.co.uk

Part No : 06427.46

1. Fix the top runner



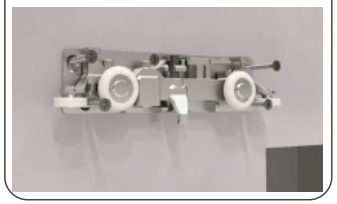

2. Fix the top track






3. Fit soft close device





4. Insert side runners



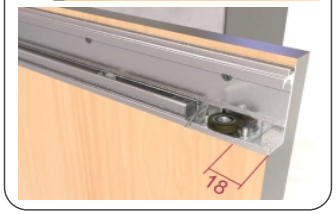

5. Cover with end caps







6. Screw bottom channel and both bottom runners





7. Screw the bottom guide roller

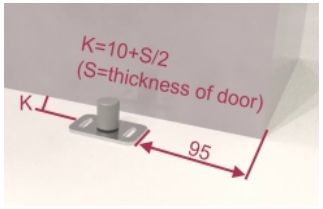

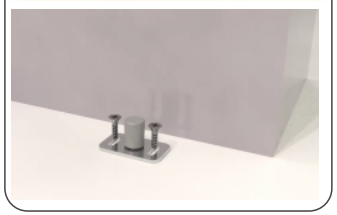


8. Unlock the safety catch







9. Hang the door

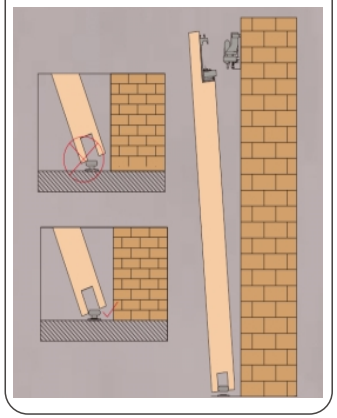


10. Height adjustment



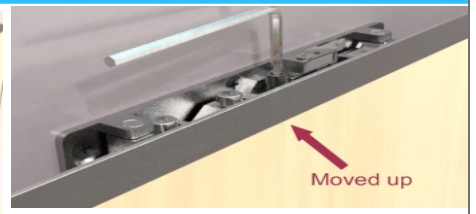

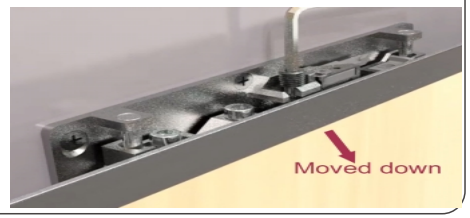

11. Left and right adjustment

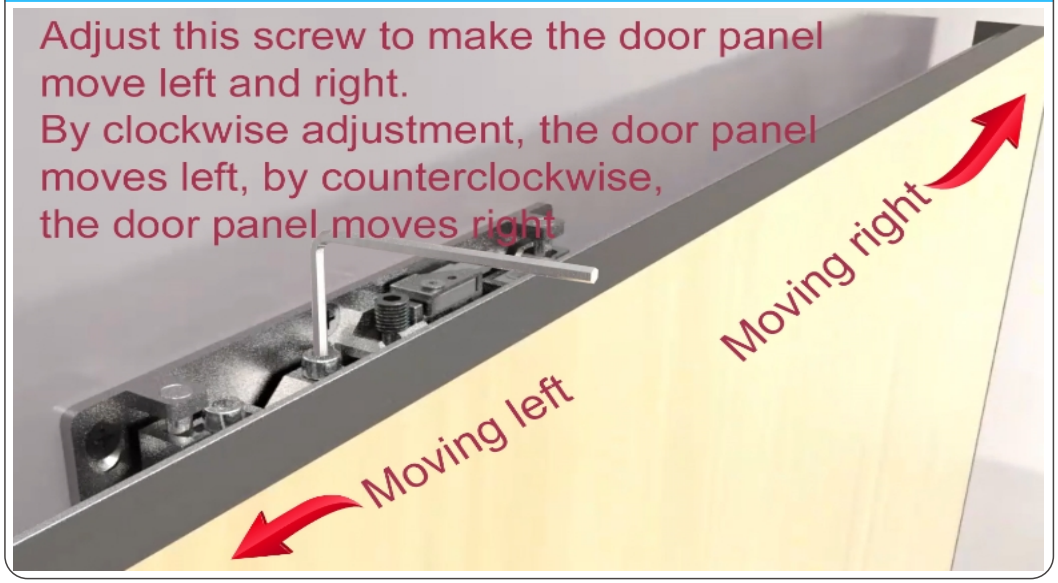

12. Lock the safety catch



