



## Straightaway 700 Commercial Sliding & Folding Door Systems

### Door Specifications

- Maximum Door Weight: 36kg
- Door Thickness: 35-44mm
- Maximum Door Width: 1200mm
- Maximum Door Height: 2700mm
- Track Dimensions: 37mm (w) x 44mm (h)

### Door Construction:

Width of door leaves vary according to arrangements, refer to drawings for details. Up to 7½ leaves may be hinged together and loose suites of 5 and 7 leaves may be used with care. The half leaf is always hinged to jamb. With swing leaves on folding suites, reduce door leaf widths to 700mm. Always engage holdback catch before operating.

### SPECIAL NOTE:

Particular attention should be paid by the joiner to leaf sizes and the use of Dimension A as shown.

### Hardware Specifications

- Track brackets usually soffit fixed. Universal soffit bracket designed for ease of fixing and versatility
- Nylon wheeled hangers with vertical adjustment
- Floor channel unnecessary under swing leaves
- Steel top track galvanised to BS EN 10346
- Aluminium bottom channel, drilled and countersunk


# Centafold 250

## Commercial Sliding & Folding Door Systems

### Product Overview

Centafold 250 is a top hung system for internal folding doors for openings without rebated heads or cills. Suitable for hospitals, schools and offices, Centafold 250 folds in the centre so half the leaves are on either side when opened.

### Technical Specification

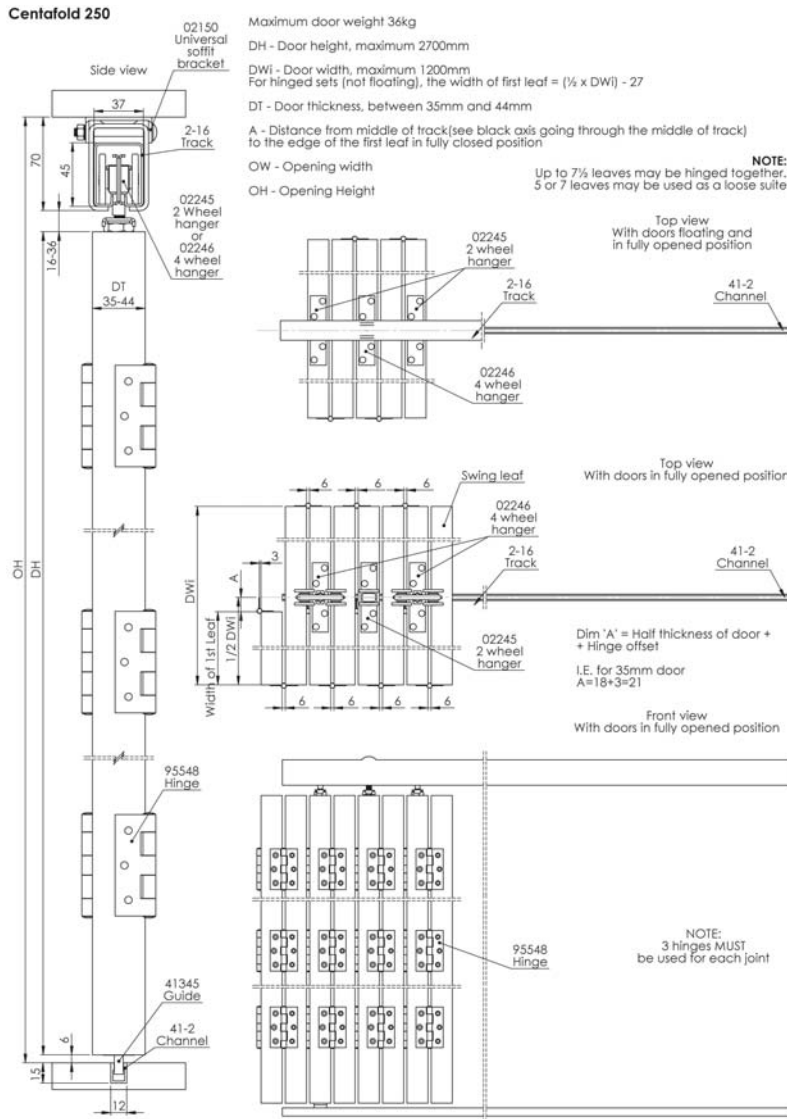

For further information please contact us:  
Tel: +44 (0)20 8545 6680 sales@coburn.co.uk www.coburn.co.uk

Article No.	Description	Image
216	Galvanised steel top track available in 1.8m, 2.1m, 2.4m, 3.0m, 4.0m and 6.0m lengths	
412	Aluminium channel available in 1.5m, 1.8m, 2.1m, 2.4m, 3.0m, 3.6m and 6.0m lengths	
02190	Open soffit bracket	
02150	Open universal soffit bracket	
02192	Lock joint soffit bracket	
02152	Lock joint universal soffit bracket	
02245	Centafold hanger with 2 nylon wheels	
02246	Centafold hanger with 4 nylon wheels	
95548	Stainless steel butt hinges (pack of 3)	
41345	Nylon swivel bottom Centafold guide on steel bracket	
95663	Holdback catch (silver finish)	
95695	Flush bolt — power coated silver 150mm	
95612	Rectangular flush handle, 50mm x 100mm, stainless steel (For our full range of accessories see pages 96-97)	

