

Foldaside 100 Residential Sliding & Folding Door Systems

Door Specifications

- Maximum Door Weight: 27kg
- Door Thickness: 20mm 40mm
- Door Construction:

Solid, louvered or flush panelled construction with adequate provision for fixing end pivots and hangers. Swing leaves may not be used (except on opposite jamb). Up to 4 leaves may be hinged together with end leaf pivoted adjacent to jamb. In situations where a greater degree of stability is required bottom guiding with floor channel should be used. For leaves over 450mm wide and/or over 15kg in weight, bottom guiding must be employed, minimum leaf thickness 30mm.

- Maximum Door Width: 600mm
- Maximum Door Height: 2500mm
- Track Dimensions:
 28mm (w) x 30mm (h) Galvanised Steel
- Track Dimensions:31mm (w) x 30mm (h) Aluminium

Hardware Specifications

- Top track can be soffit fixed or side fixed with the use of brackets
- Aluminium bottom channel drilled and countersunk for woodscrews to be recessed into floor

- For doors under 450mm and/or under 15kg in weight no floor channel is required
- Suitable for pairs of bi folding doors only, up to 4 doors can be hinged together
- Vertical and lateral adjustment on pivot, vertical adjustment on hangers
- Concealed fixings for hangers and pivots
- 3 concealed hinges per joint on doors up to 2.1m, 4 per joint on doors up to 2.5m


Foldaside 100

Residential Sliding & Folding Door Systems

Product Overview

Foldaside 100 is a lightweight folding system for pairs of internal timber doors. It is a quick and easy system to install and ideal for walk in cupboards, wardrobes and room dividers.

Technical Specification

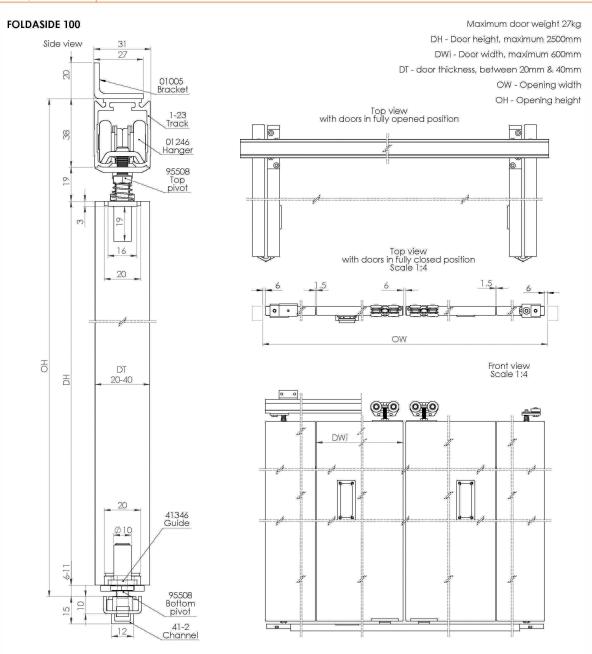



Foldaside 100

Residential Sliding & Folding Door Systems

Article No.	Description	Image
01215	Trackset for 2 doors within a 1200mm opening	
01424	Trackset for 4 doors within a 2400mm opening (suitable for 4 doors one way or 2 doors each way)	***************************************
01120	Component pack for 2 doors	
01140	Component pack for 4 doors (suitable for 4 doors folding one way)	· · · · · · · · · · · · · · · · · · ·
123	Anodised aluminium top track available in 1.8, 2.0, 2.4, 3.0, 3.6, 4.0, and 6.0m lengths	
412	Aluminium channel availab <mark>le</mark> in 1.5, 1.8, 2.1, 2.4 and 3.0m lengths	
01005	Steel side fixing brackets (pack of 5)	A SEE SE
01008	Steel side fixing brackets (pack of 8)	
01246	4 wheel folding hanger, nylon wheels	
95508	Top and bottom pivots	

Article No.	Description	Image
95509	Top and bottom jamb fixing pivots	+
95523	Concealed hinges (packof 3)	*###
41346	Door guide with steel plate and nylon swivel	
95612	Rectangular flush handle, 50mm x 100mm, stainless steel. Depth 16mm, consider thickness of doors when fixing back to back. (For our full range of accessories see page x)	
95695	Flush bolt – power coated silver 150mm	

Trackset contents: Aluminium top track, steel brackets, nylon wheeled hangers, pivot set, nylon guide, aluminium bottom channel, concealed hinges, spanner and all necessary woodscrews.

Component pack contents: Nylon wheeled hangers, pivot set, concealed hinges, spanner and all necessary woodscrews.

Note: Galvanised steel track and alternative enclosed side wall bracket available, contact Coburn for details.



Foldaside 100

Residential Sliding & Folding Door Systems





